


- 5 Use the Bather's control panel to set the temperature, select the filtration, and turn on the jets and lights.

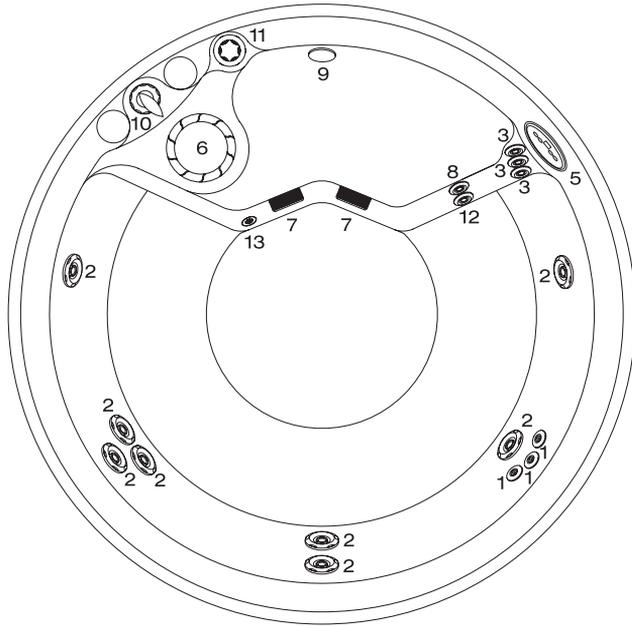


#	Component Identification	Qty.
1	HK™8 Jets	3
2	HK™12 Jets	8
3	HK™40 Jets	3
5	Bather's Control Panel	1
6	Filter Canister	1
7	Suction Fittings	2
8	Ozone-ready Injector Fitting	1
9	Light	1
10	Jet Selector	1
11	Spa Frog® Sanitation (option)	1
12	Spa Frog® Return Fitting (option)	1
13	Drain Fitting	1
Physical Specifications		Size
Dimensions		76" diameter
Height		35"
Interior Depth		32.5"
Seating Capacity/Positions		4/5
Weight Dry/Lbs.		550
Weight Full/Lbs.		2635
Water Capacity/Gallons		250
Total Therapy Jets		14

**ATTENTION:** If you have problems priming the pump use the black thumbscrew in the upper corner of the door area to relieve the air lock to the pump. Use this solution as you are filling the spa or if the pump is running but no water is coming out of the jets. Please refer to start up instructions in the Owner's Manual.

1. Make sure the spa power is off.
2. Remove the door.
3. Remove the thumbscrew while filling the spa. (If spa is full remove the thumbscrew and let all air purge.)
4. Once air is purged replace the thumbscrew.
5. Power up the spa.
6. Make sure there are no leaks at the thumbscrew. Replace the door.

## the Envy II™

- 5** Use the Bather's control panel to set the temperature, select the filtration, and turn on the jets and lights.

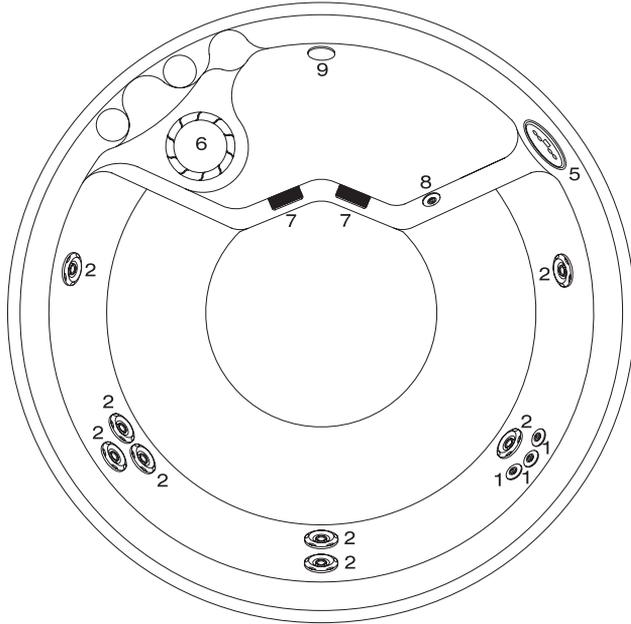

#	Component Identification	Qty.
1	HK™8 Jets	3
2	HK™12 Jets	8
5	Bather's Control Panel	1
6	Filter Canister	1
7	Suction Fittings	2
8	Ozone-ready Injector Fitting	1
9	Light	1
Physical Specifications		Size
Dimensions		76" diameter
Height		30.5"
Interior Depth		29"
Seating Capacity/Positions		4/5
Weight Dry/Lbs.		450
Weight Full/Lbs.		2368
Water Capacity/Gallons		230
Total Therapy Jets		11

**ATTENTION:** If you have problems priming the pump use the black thumbscrew in the upper corner of the door area to relieve the air lock to the pump. Use this solution as you are filling the spa or if the pump is running but no water is coming out of the jets. Please refer to start up instructions in the Owner's Manual.

1. Make sure the spa power is off.
2. Remove the door.
3. Remove the thumbscrew while filling the spa. (If spa is full remove the thumbscrew and let all air purge.)
4. Once air is purged replace the thumbscrew.
5. Power up the spa.
6. Make sure there are no leaks at the thumbscrew. Replace the door.